

Kid & Cargo Carrier Instruction Sheet

Model #AC814

1-800-621-7613
customerservice@radioflyer.com

WARNING!

- Read all safety warnings and instructions before using the product. Failure to follow warnings and instructions may result in serious injury or death.
- You must also reference the owner's manual that was shipped with your Flyer™ eBike before using this accessory:



- Incorrect assembly, maintenance, or use of your Flyer™ accessory can cause component failure, loss of control, serious injury, or death. Please note, the assembly of Flyer™ accessories require special tools and mechanical skills. It is highly recommended that the assembly and adjustment are completed by a reputable bicycle mechanic when possible.
- Only for use with the Flyer™ eBike.
- Adding load to accessories or add-on mounting feature may lessen the stability or alter the riding characteristics of the bicycle
- Maximum Load Capacity: 130lbs
- Rider and children should always wear helmets that have been approved to nationally recognized standards.
- Only carry children ages 5-10 years
- Step off of the bike and put the bike on its kickstand before assembling, adjusting or interacting with accessories.

HARDWARE

A 4X - M5 22mm Pan Head Screw



B 8X - 10mm Screw




C 4X - M5 Lock Washers



D 4X - M5 Washer



E 8X - 25MM Barrel Bolt




TOOLS

M4 Allen Key




2X -M3 Allen Key




PARTS


A 1X - A Frame, Rear



B 1X - A Frame, Front




C 2X - Hoop

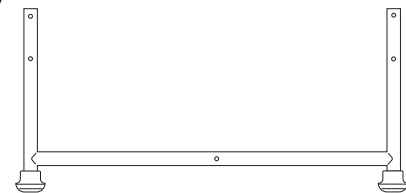


D 1X - Rear Seat Pad



E 1X - Front Seat Pad




F 1X - Padded Backrest




Constructing Kid & Cargo Carrier Frame

Align the left and right hoops with the bottom support frames. Feed the bolts through the holes that run through the top hoops and bottom frame. Install the 10mm screw into the bottom of each bolt and tighten to 3Nm.

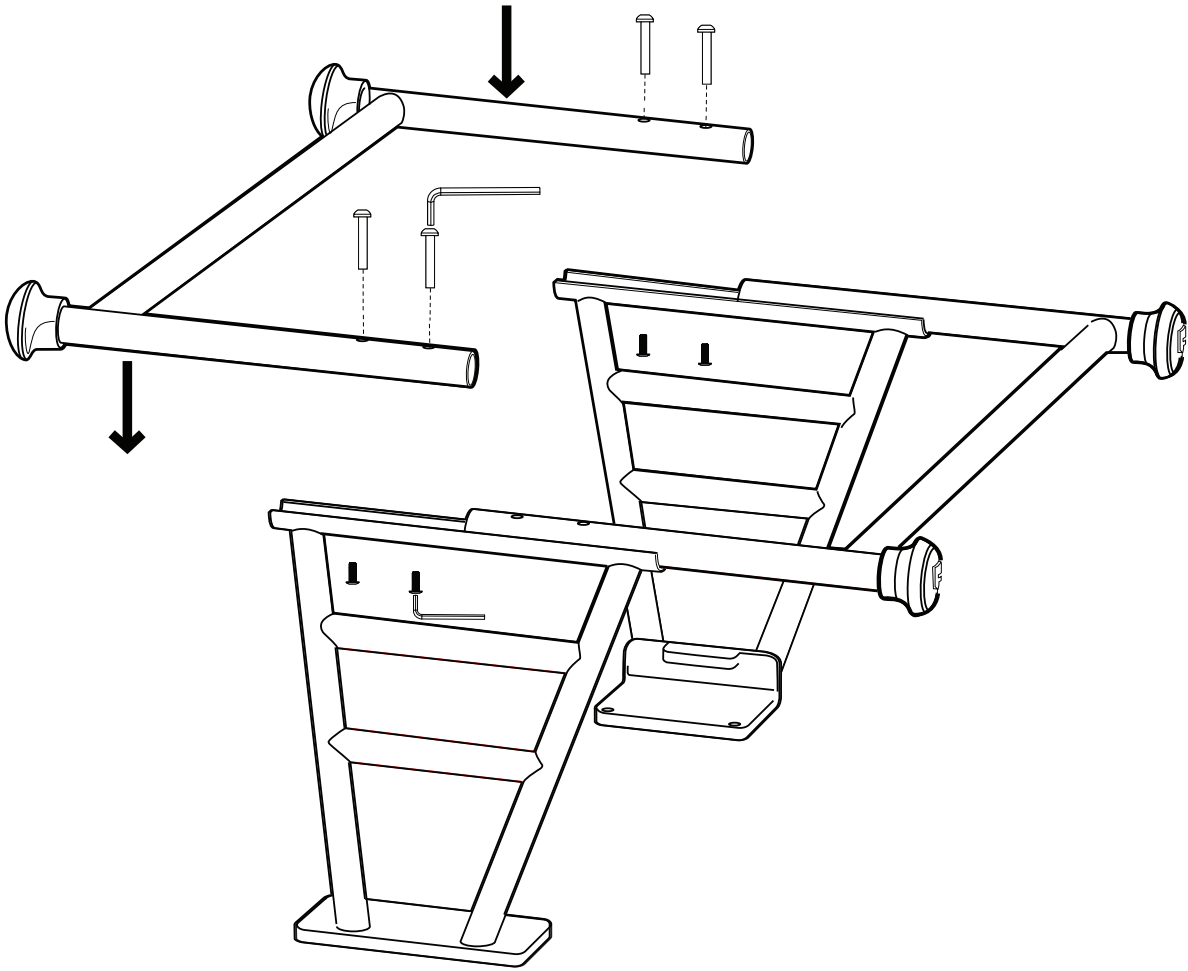



Installing Kid & Cargo Carrier Frame

Slide a lock washer onto each 22mm screw. Next, slide a washer onto each screw. Lay the Kid & Cargo Carrier on the bike's rear rack and align the holes. Ensure the A Frame with the larger plate is at the back of the bike. Tighten the 4 screws by hand, then fully tighten using the Allen key to 3Nm.

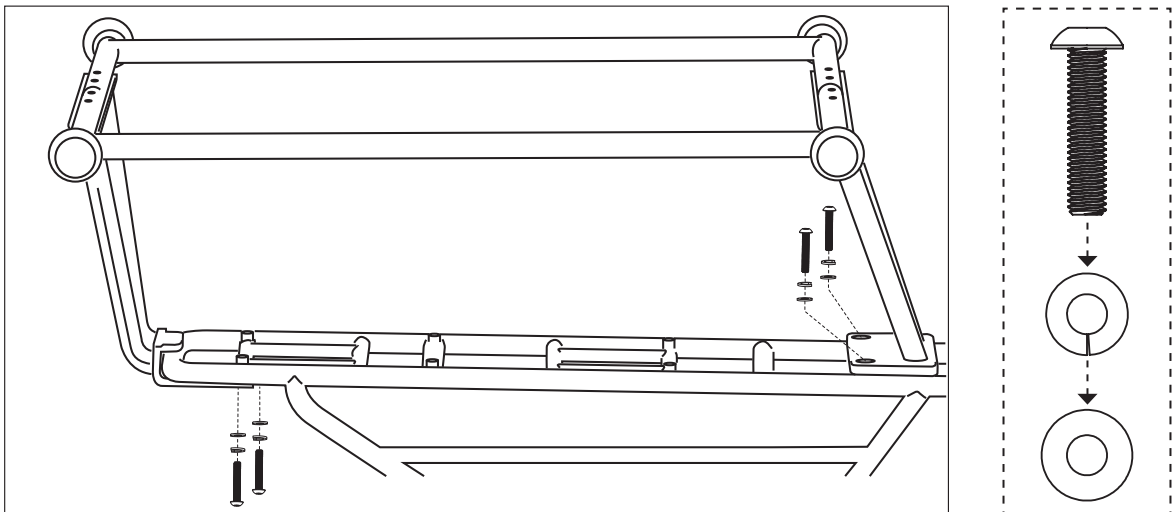


Installing Padded Seats

- A. Place the long seat pad in the front position on the rear rack and the short seat pad in the rear position on the rack. Make sure all the straps hang down outside of the rear rack. The raised features on the bottom side of the rack should align with the horizontal bars as shown in the graphic.
- B. Loop the long Velcro strap in between the opposing D-ring under the rack. Secure the seat pad in place by pulling firmly on the Velcro strap and adhering it to itself. If properly tightened, the seat pad should not shift when jostled.

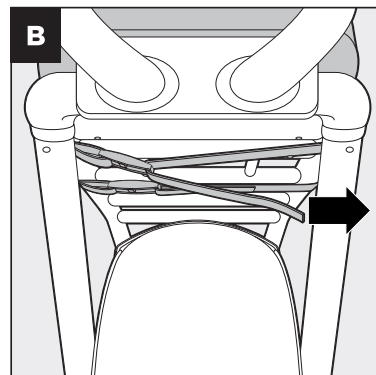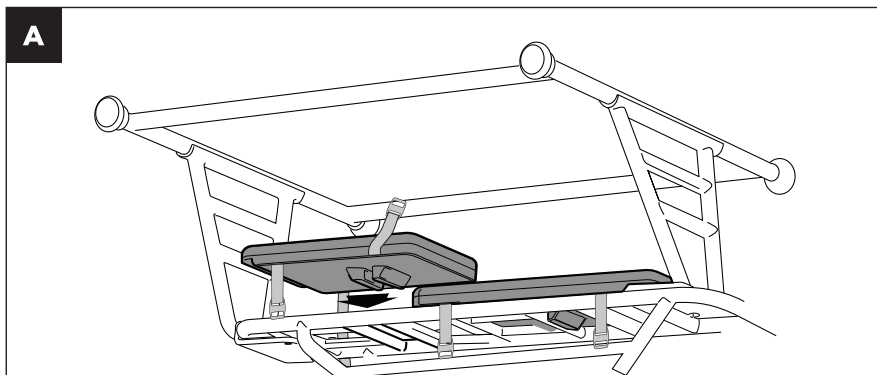

Installing Padded Backrest

Wrap the Padded Backrest around the Rear A-Frame so that the “Flyer” logo is facing rearwards. Secure the snaps along the bottom edge.

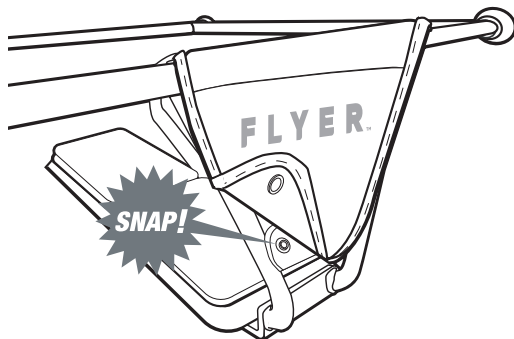

Installing Add-On Accessories

Additional Add-On accessories can be mounted to the Kid & Cargo Carrier using the included hardware. Please note that we cannot guarantee that all add-ons will be compatible. Be sure to follow all instructions and safety warnings detailed in the add-on documentation. Always inspect your bike to ensure any add-ons or cargo do not obstruct any function of the eBike.

